




HANDLING MANUAL
HPS40-2 2+2 with CPA

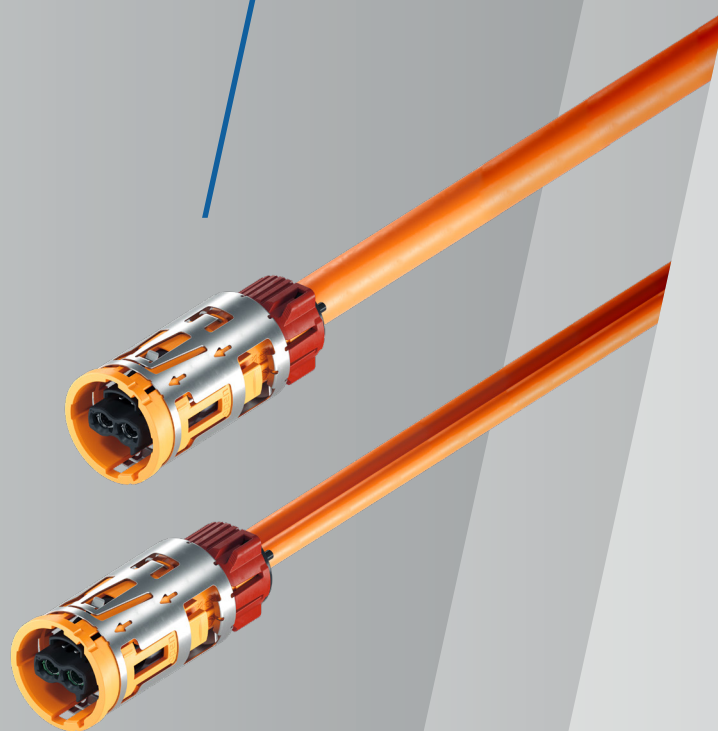


HIRSCHMANN
AUTOMOTIVE


1 Instruction manual – plugging

1.1 Step 1

Collar the connector [1] to the mating side [2] and insert the connector.

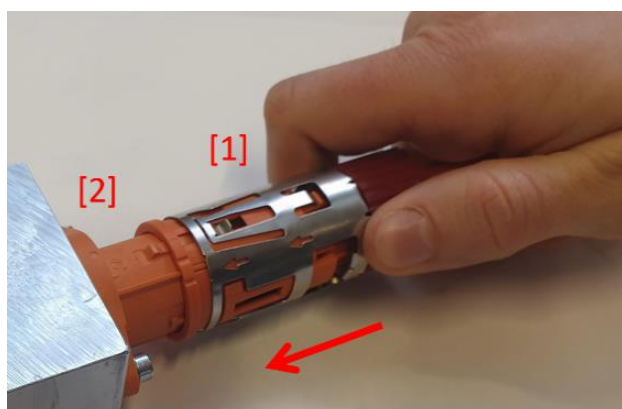


TIPP:

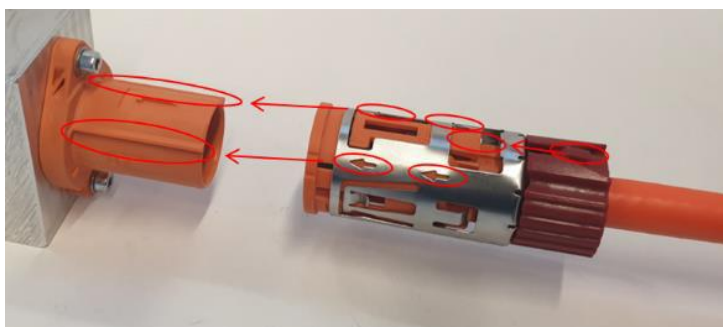


Consider the correct orientation/
alignment of the edges cap
> arrows CPA > bars plug housing.

1.2 Step 2

Insert the connector with force until block.

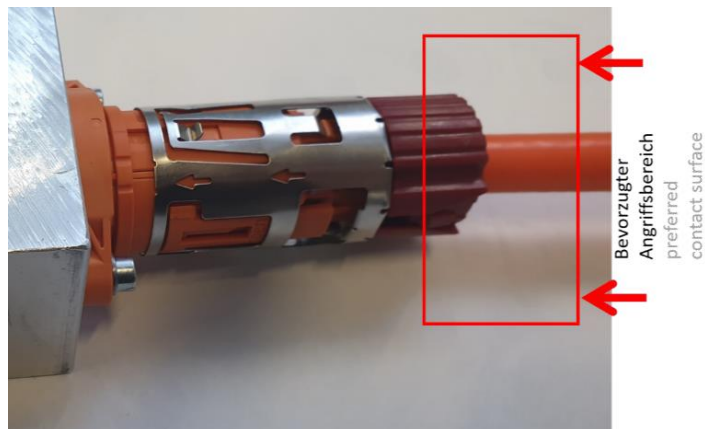

TIPP:

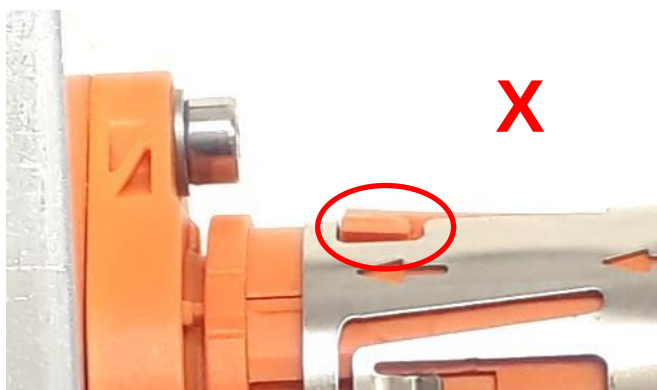


If the connector is not at final position, the locking hook stays outside.
Moving the CPA (argentic part) isn't possible.




1.3 Step 3

Move the CPA (argentic part) to the front block.

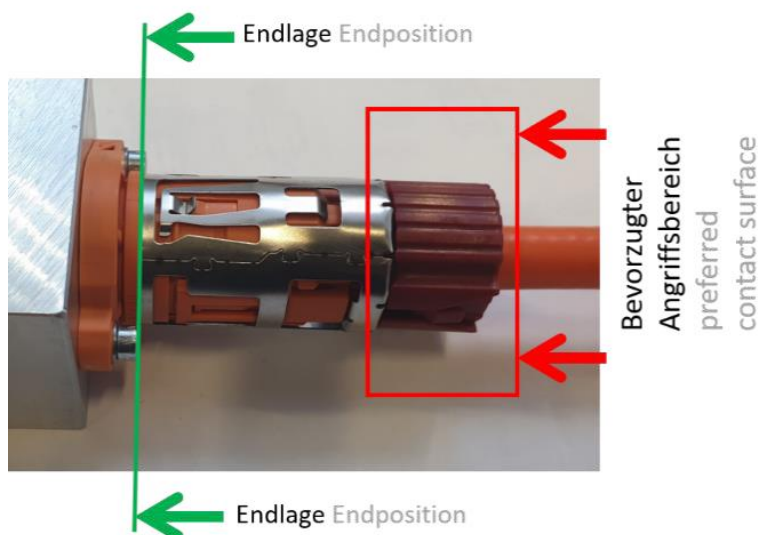

TIPP:

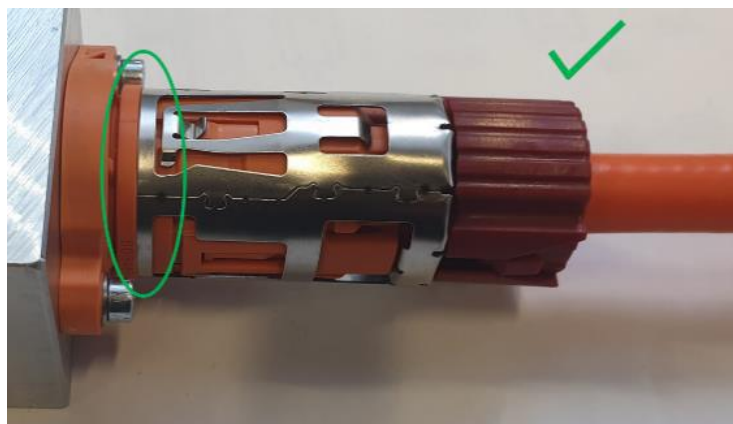


CPA (argentic part) is at final position if the marked gap is visible.


2 Instruction manual - disconnect

2.1 Step 1

Use Screwdriver 0.8x4.0 mm to unlock the over cap and pull it back.

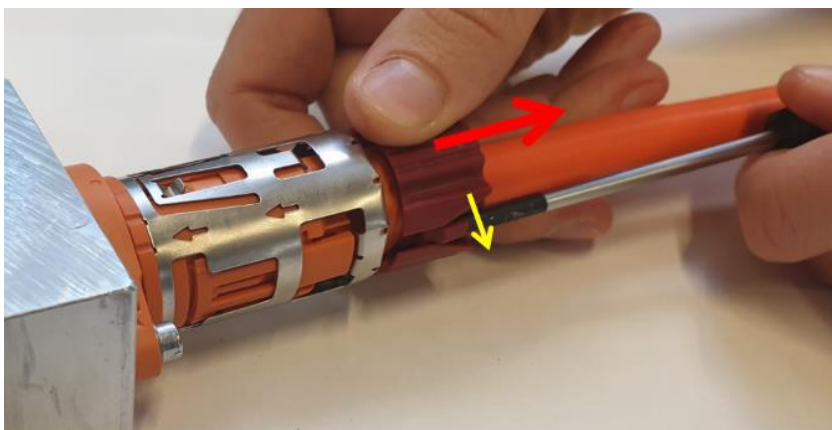


TIPP:

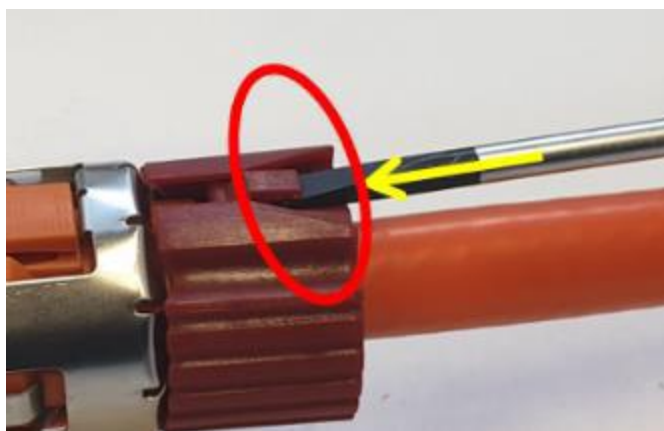

Carefully lever the retainer with the screwdriver.

2.2 Step 2

Pull CPA (metall sleeve) back to blocking position.

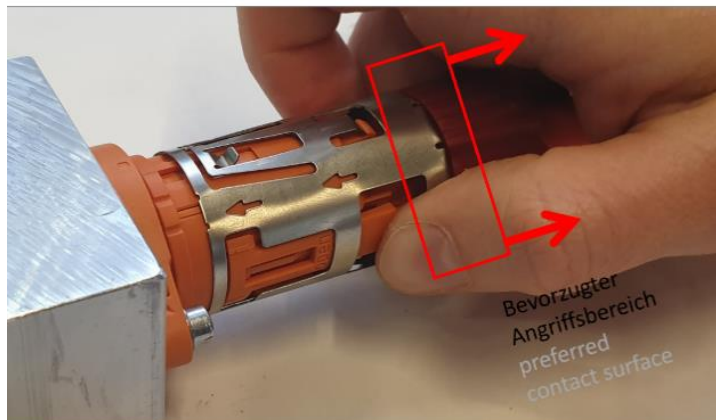


TIPP:



Pulling back by holding at marked area on both side simultaneously.

2.3 Step 3

First pressing both locking hooks together and then pull the connector.

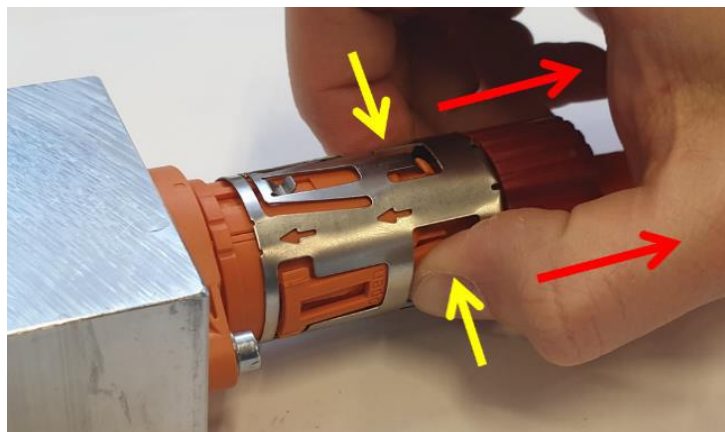

TIPP:



Pressing area of locking hook on both sides.
If it is easier, it is allowed to support by pulling at the cable.